








FILE: ZB02/	6	5	4	3	2	1
REV	CONTENT		CHK	DATE		
V2.0	品名型号修正		CXL	14.08.26		

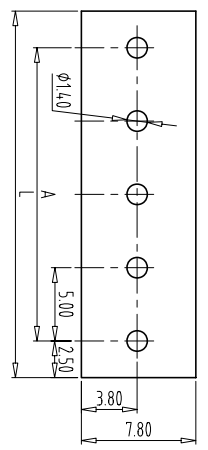

PCB LAYOUT
S=2:1

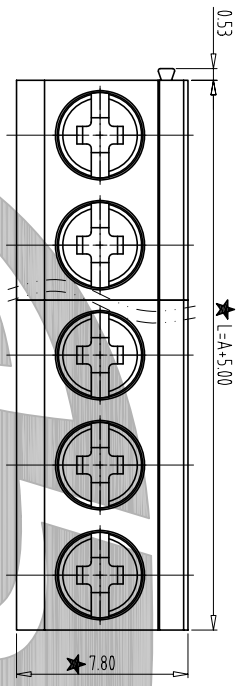

- NOTES:
1. Rating:300V 10A;
 2. Insulation Withstands Voltage: AC2000V/MIN
 3. Insulation Resistance: 500MΩ or more at DC500V
 4. Using Temperature Range: -40°C/+105°C
 5. Screw Torque Value:0.4Nm
 6. Suitable Electric Wire: 14-22AWG
 - 7:★ is the important dimension;
 8. RoHS Compliance.

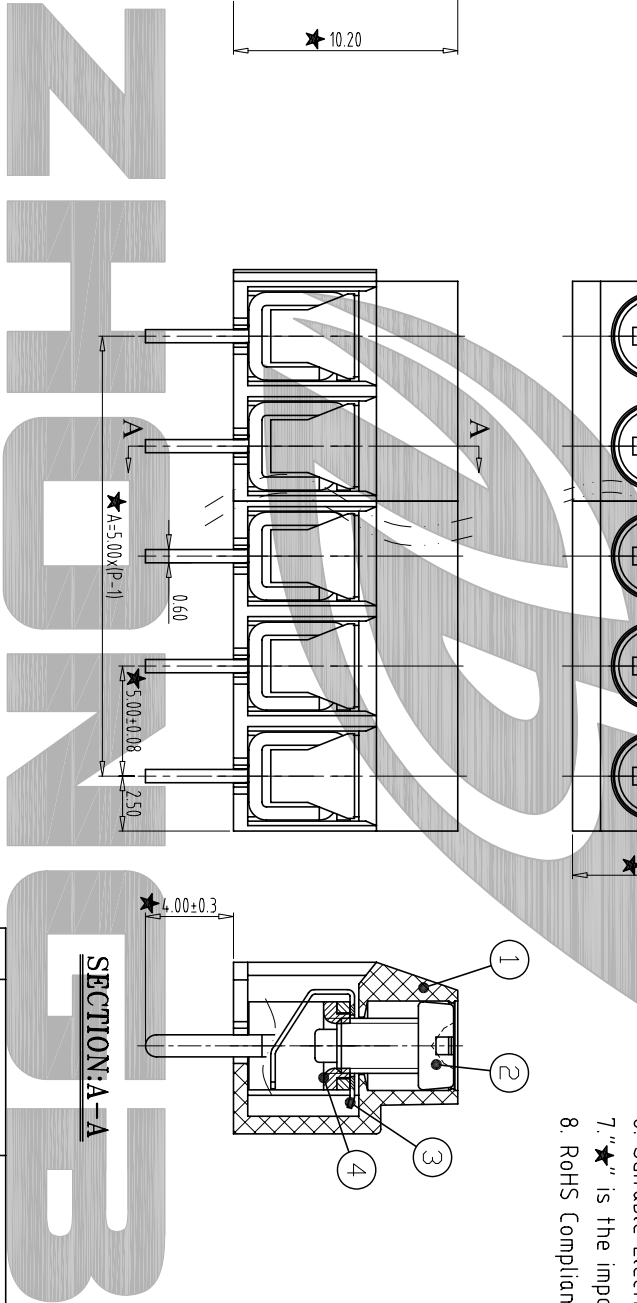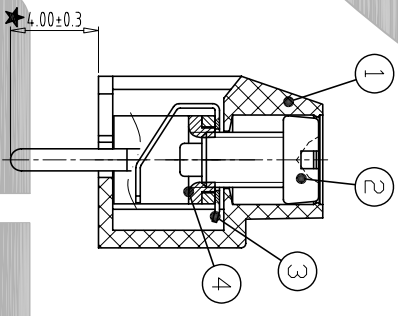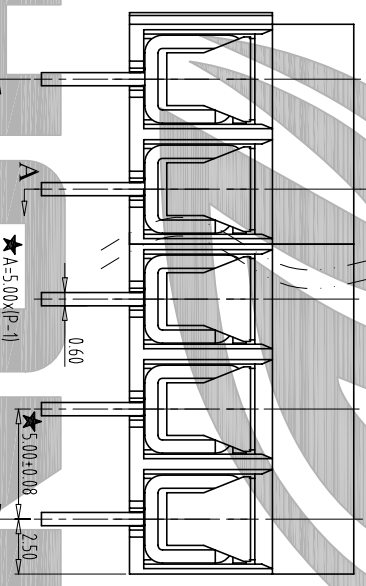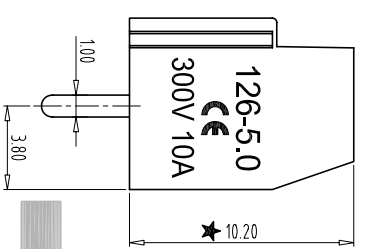

SECTION:A-A

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
4	SOLDER PIN	ZB126B0003	P	BRASS	Tin Plated
3	SPRING COIL	ZB126C0001	P	STAINLESS STEEL	
2	SCREW	ZBST0010	P	STEEL	Zn Plated
1	HOUSING	ZB126A0XX02 ZB126A0XX03	/	PA66(V0)	02/03P

Total Pitch Tolerances		Nominal dimension range	
In mm		In mm	
0	30	0	30
30	53	30	53
53	70	70	90
70	90	90	115
90	115	115	150
115	150	150	200
150	250	200	250
250	350	250	320
350	500	320	10
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250	0	over
250	350	0	over
350	500	0	over
500	0	0	over
0	30	0	over
30	53	0	over
53	70	0	over
70	90	0	over
90	115	0	over
115	150	0	over
150	250		

